




VIC CODE MOUNTABLE KERB AND CHANNEL

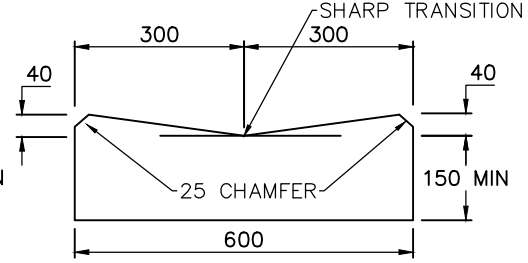


OPEN CHANNEL - OC

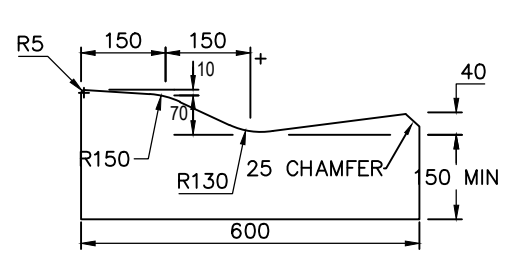


MOUNTABLE KERB AND CHANNEL

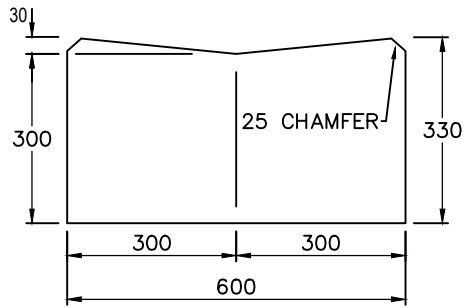

600mm OPEN CONCRETE CHANNEL

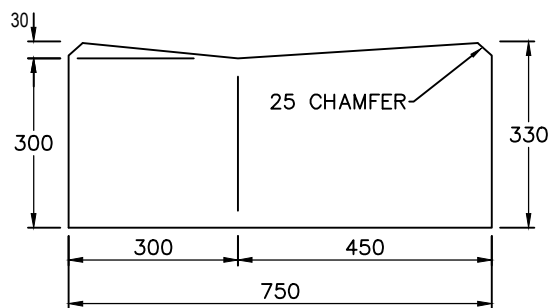

750mm OPEN CONCRETE CHANNEL

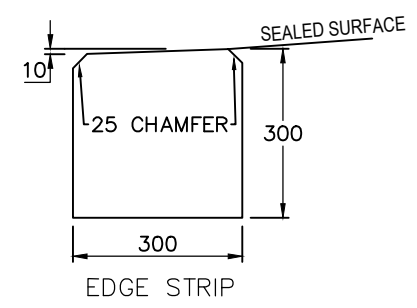


EDGE STRIP

**NOTES**

1. KERB PROFILES ARE ALL AS PER VICROADS STANDARD DRAWINGS.
2. MINIMUM DEPTH OF PAVEMENT BELOW THE KERB MUST BE THE GREATER OF THE PAVEMENT DESIGN OR 100mm OF CLASS 3 CRUSHED ROCK.
3. PAVEMENT TO FINISH 5mm ABOVE THE LIP OF CHANNEL.
4. WHERE CONCRETE ABUTS KERB AND CHANNEL, ALL EDGES ARE TO HAVE A 5MM RADIUS.
5. CONCRETE SHALL BE NORMAL CLASS N25 COMPLYING WITH THE REQUIREMENTS OF AS.1379. REFER TO VICROADS STANDARD SPECIFICATION 703 FOR REQUIREMENTS OF CONCRETE TO BE USED IN EXTRUSION MACHINES.
6. WEAKEN PLANE JOINT TO BE 2500 CENTRES
7. KERB PROFILES SHOWN ARE ONLY TO BE USED WHEN REINSTATING TO MATCH EXISTING PROFILES. NEW KERBS TO BE AS PER EDCM 301 & 302
8. ALL DIMENSIONS SHOWN ARE IN mm UNLESS OTHERWISE SHOWN

17/11/2017 2:07:02 PM

E	M.H	12/16	REVISED DRAWING FONTS	GENERAL NOTES		DESIGN	B.SELL	PROJECT	STANDARD DRAWINGS - MCC 304	N.T.S.
D	M.H	06/11	REVIEWED DRAWING AND UPDATED NOTES			DRAWN	B.SELL			
C	M.H	06/11	REMOVED PROFILES AND RETAINED MELTON SPECIFIC KERB TYPES			CHECKED	M.HUTCHINSON	MELTON CITY COUNCIL SPECIFIC KERB TYPES		
B	P.J.	01/08	MATCHED KERB PROFILES TO VICROADS STANDARD DRAWINGS			DATE	APRIL 16		FILE NAME	MCC 304 MELTON COUNCIL SPECIFIC KERB TYPES.DWG
A	J.V	06/07	REVIEWED AND UPDATED 2000 STANDARD DRAWINGS			ISSUE	APPD	DATE		
AMENDMENT										