




**1 BIKE HOOPS PARALLEL TO KERB / BUILDING**  
PLAN 1:20

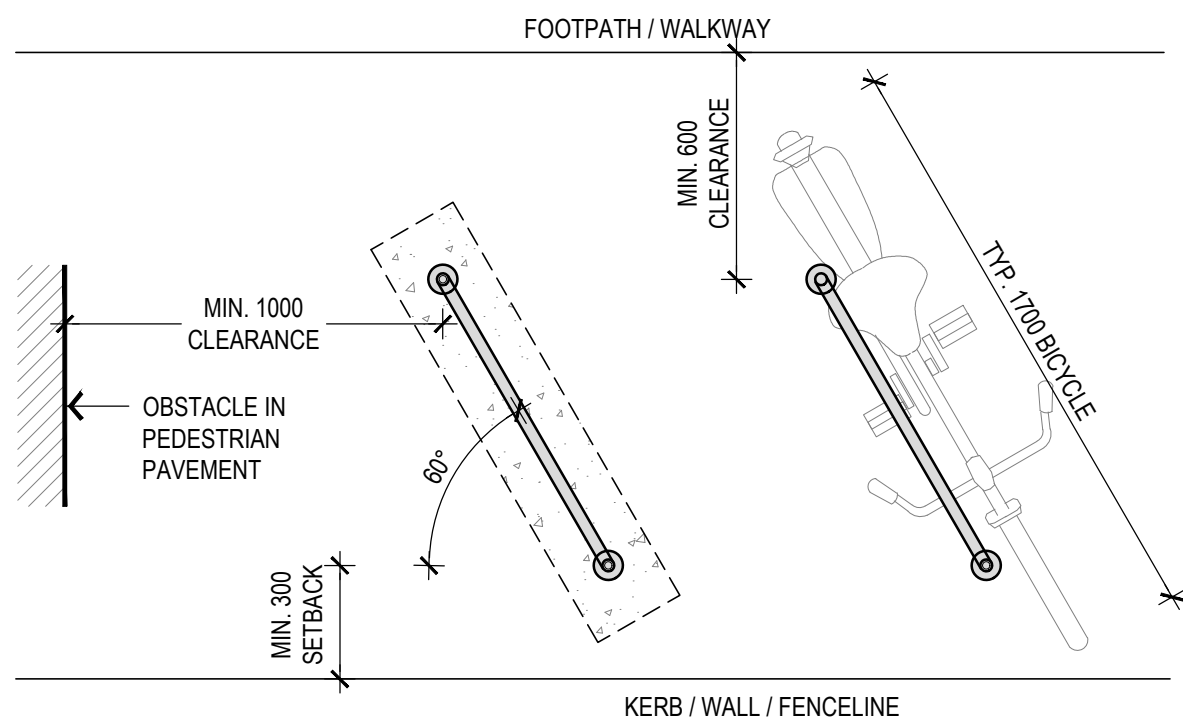

**3 BIKE HOOPS ANGLED TO KERB PLAN**  
PLAN 1:20

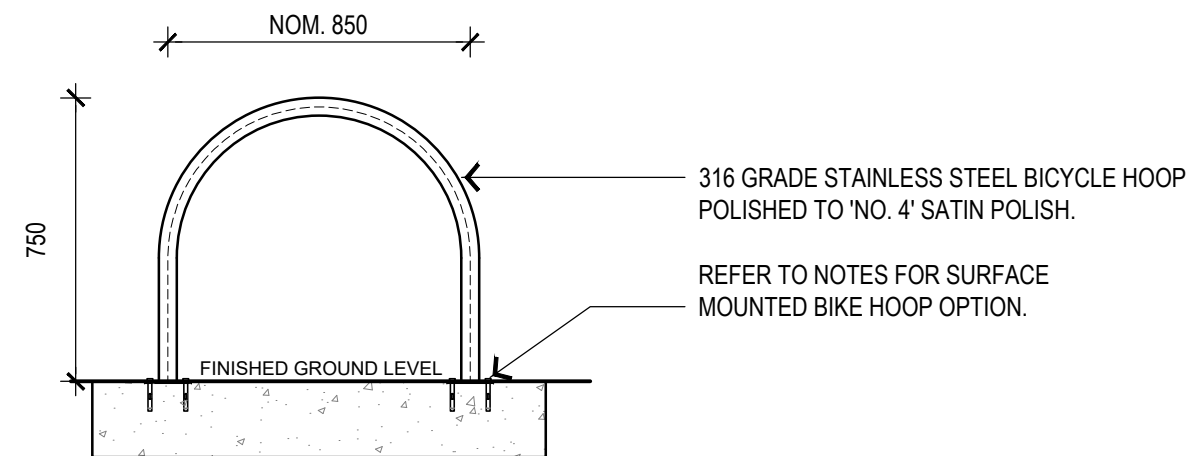

**2 BIKE HOOPS**  
Cross section 1:20

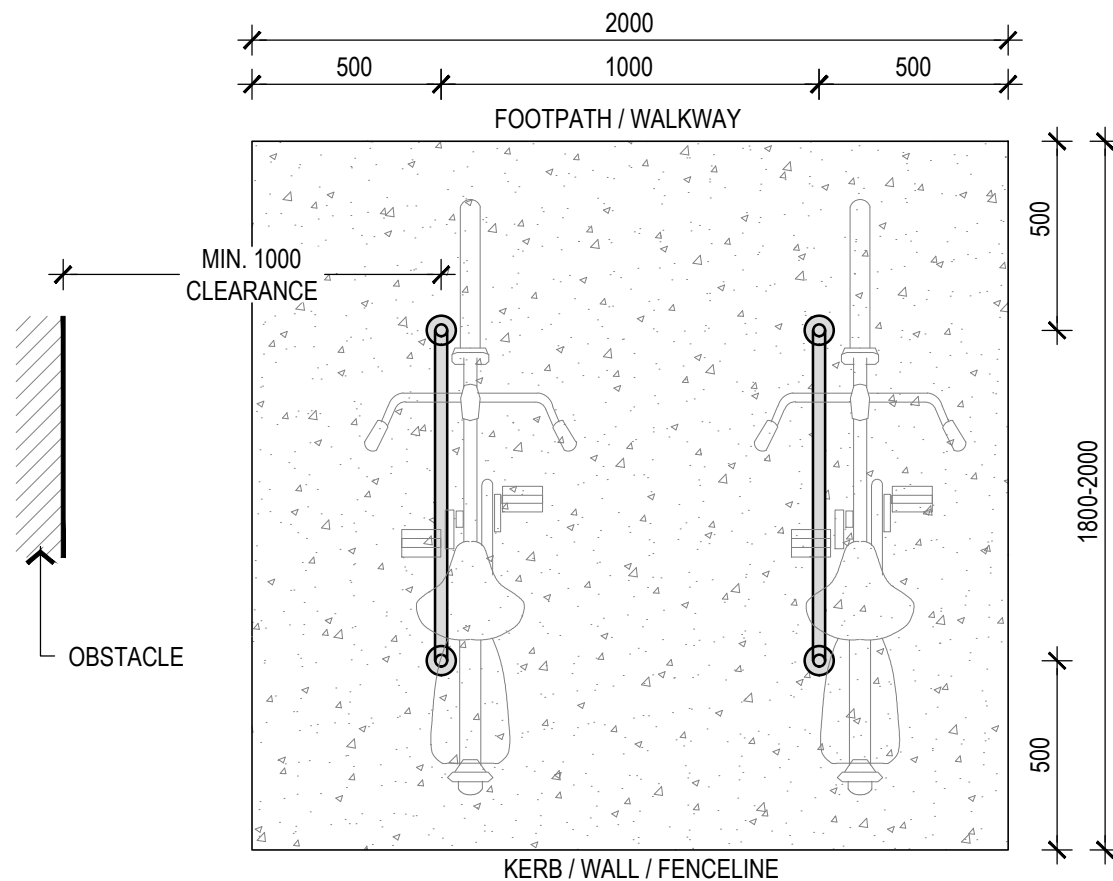


**4 90° BIKE HOOP CONCRETE PAD**  
PLAN 1:20

**NOTES:**

1. BICYCLE HOOPS ARE TO BE LOCATED WITHIN FOOTPATHS ALONG CYCLE ROUTES, CYCLE DESTINATION POINTS OR PUBLIC ATTRACTORS.
2. POSITION BIKE RACK AT AN ANGLE OF 60°, 45° OR 30° TO KERB EDGE WHERE SPACE IS LIMITED, OTHERWISE PERPENDICULAR (90°).
3. BICYCLE HOOPS SHOULD BE INSTALLED IN GROUPS OF TWO OR MORE.
5. BOLT DOWN FIXINGS TO BE MIN.10-12mm DIAMETER HOT DIPPED GALVANISED OR 316 STAINLESS STEEL TORQUE CONTROLLED EXPANSION ANCHORING SCREW WITH TAMPER PROOF HEAD AND IN ACCORDANCE WITH MANUFACTURERS SPECIFICATIONS.

E			
D			
C			
B	M.H.	3/06/25	PUBLISHED REVISION
A	M.H.	30/01/25	PRELIMINARY FOR REVIEW
ISSUE	APPROVED	DATE	DETAILS

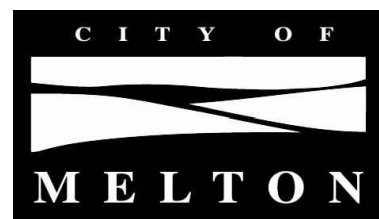

ENGINEERING & ASSET SERVICES

# STANDARD DRAWINGS LANDSCAPE

DRAWING No.	MCCLA 106		DRAWN S. HUANG	CHECKED M. HUTCHINSON
			SCALE 1:20	DATE 03/06/2025
	DRAWING NAME FURNITURE - BIKE HOOP		PAPER A3	REV B
			SHEET 1	OF 1